



## THE DOUBLE STAR WHEEL RAKE



## FORAGE QUALITY

-66% ASH

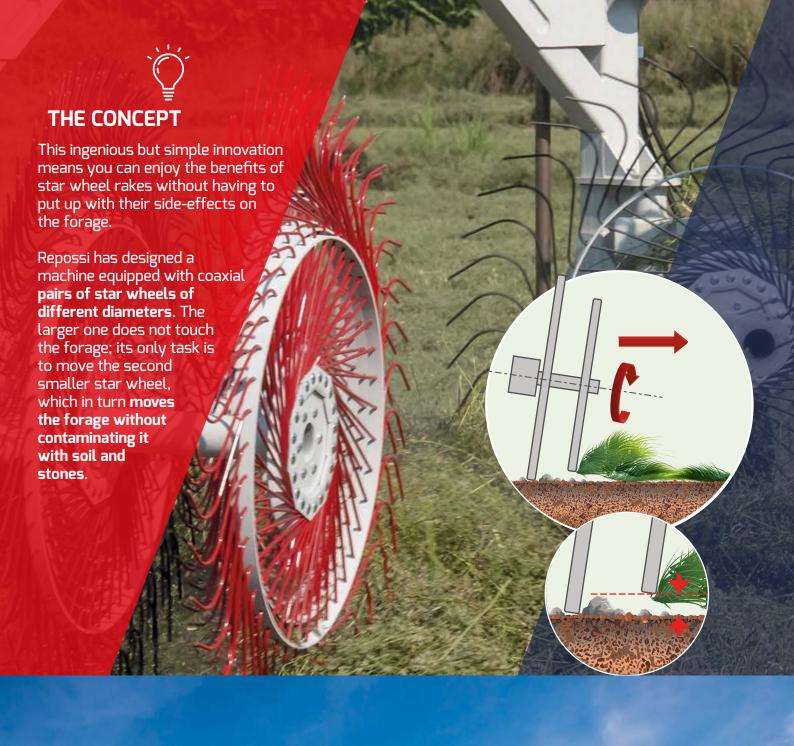



Raking always increases the amount of forage ash contamination. This contamination has to be kept to a minimum.

The average increase in ash in the forage the Ra-Rake produces is 66% lower than that caused by other existing types of rake (rotary, etc.) with all the consequent benefits.





The difference between forage harvested with the RA-Rake and forage harvested with a rotary rake has been measured in terms of energy in scientific tests (FUm = Feed Unit Milk). The difference in favour of the RA-Rake is 0.039 FUm per kg of dry matter.

Since the animal has to consume 0.42 FUm in order to produce one kilogram of milk, the energy difference between the two forages means that each cow produces 0.80 kg more milk every day under the same conditions.

This increase in productivity results in a herd of 250 animals producing 73,000 kg more milk each year. With the price of milk at  $0.32 \ \text{e/l}$ , this means about  $\ \text{e} \ 23,000$  per year in extra income.

Results of scientific tests carried out by a team coordinated by professor Luca Rapetti, head of





+0,039 FUm



+0,80 Kg milk





On the basis of the results of the analysis of the numerous samples collected, two rations were simulated, each measured out to produce 27.50 kg of milk: the first with forage raked with the RA-Rake, and the second with forage obtained using another rake.

In order to achieve a sufficiently high nutritional value, a certain amount of **soybean meal** was added to each ration.

Thanks to the higher energy value of the forage harvested with the RA-Rake, the corresponding ration contains 0.3 kg less soybean meal than the other. With a 250-animal herd and with a soybean meal price of € 340 per tonne, this means an annual saving of about € 9.300.

Resear compa other r costs (ii variable operatin from the

The cost 6.20 less working a of about €

the Department of Agricultural and Environmental Sciences at the University of Milan, as p



Would you like to calculate how much your company could save with an RA-Rake? Display and access the spreadsheet on our website.

20 km/l **SPEED** 





### **RA-RAKE DATA SHEET**

MODELS	Working width	Length	Transport height	Front star wheels	Rear star wheels	Main wheels	Secondary wheels	Weight	Minimum power
12+12 VS	7.5 m	8.44 m	2.10 m	12	12	10.0/75-R15.3	200/60-14.5	2450 kg	40 Hp
14+14 VS	9.0 m	9.30 m	2.10 m	14	14	10.0/75-R15.3	200/60-14.5	2650 kg	40 Hp

The Ra-Rake has obtained **European Road Approval** from the Italian Ministry of Infrastructure and Transport, in compliance with EU regulation 167/2013 (aka the Mother Regulation).

# SAFE ON THE ROAD The machine is 2.55 m wide for easy, safe road transportation. HEAVY DUTY Swivel wheel dampers absorb shocks on uneven ground and protect the structure. MANOEUVRABLE A steering angle of +/- 74° means the machine is highly manoeuvrable.

### **REPOSSI MACCHINE AGRICOLE**

Repossi Macchine Agricole was founded in 1898 and has been owned by the Repossi family for four generations. The company designs and manufactures hay-making machines and equipment for animal husbandry. Its history is marked by the first trailed comb rake (called the Fortuna), which was joined over the years by other types of rake (self-propelled, rotary, double, triple and electro-hydraulic), hay tedders, machines for barns, etc., right up to the current wide range of products and services, which result from a high degree of specialization and expertise.



Repossi Macchine Agricole srl 40 Via Vittorio Emanuele II 27022 Casorate Primo (PV) - Italy VAT n. 01981040189 Tel +39 02 9056625

www.repossi.it email info@repossi.it